


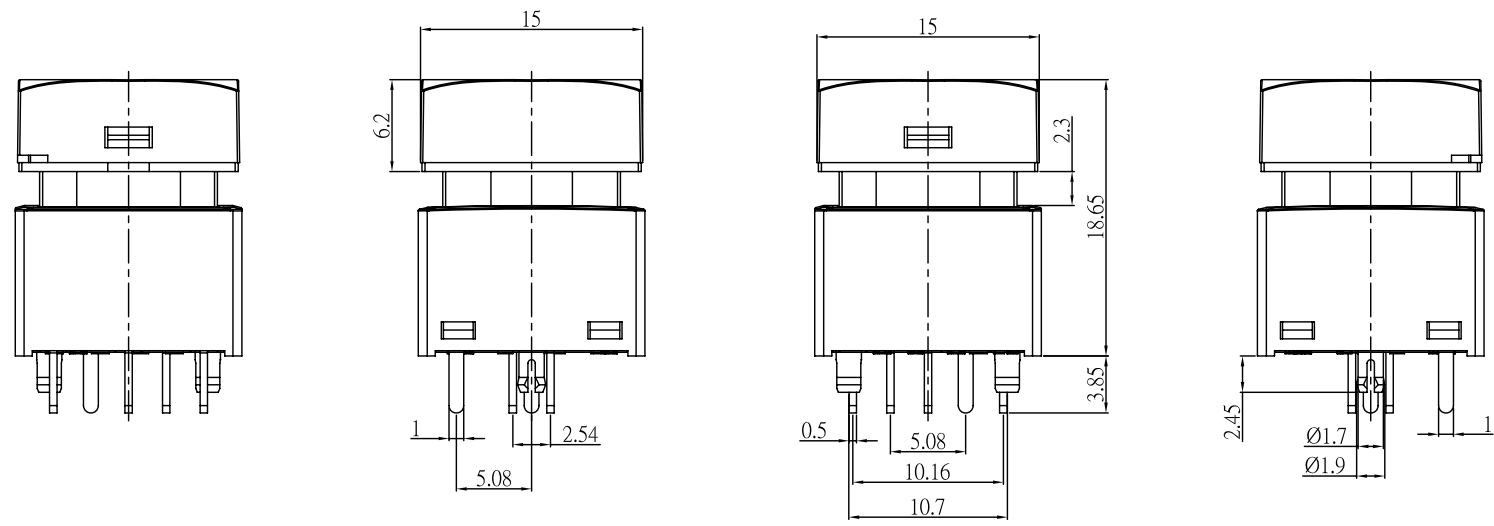



DIMENSION	TOLERANCE
≤10	±0.3
10~100	±0.5
≥100	±0.8




1. RATING : 28 V DC , 0.4A .
2. CONTACT RESISTANCE : 100 mΩ , MAX .
3. INSULATION RESISTANCE : DC 500 V / 100 MΩ , MIN .
4. WITHSTAND VOLTAGE : AC 500 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25°C ~ 70°C .
6. OPERATING FORCE : 200±100 gf .
7. LIFE CYCLE: 200,000 CYCLES .



SW CIRCUIT



LED CIRCUIT



PCB LAYOUT

UNIT	SCALE	ANGLE TER	VIEW	MODE						
mm	1 : 1	± 3°		PUSH SWITCH WITH LED						
VER	DATE	APPROVAL	CONFIRM	DESIGN	ENGINEERING RECORD DESCRIPTION	PLB-N1PWB-ATW				Tel: (86)755-29424722/29424733

[WWW.SZLAKEVIEW.COM](http://WWW.SZLAKEVIEW.COM)  
ELECTRONICS CO., LTD