| DIMENSION | TOLERANCE |
|---|---|
| ≤10 | ± 0.3 |
| 10~100 | ± 0.5 |
| ≥100 | ± 0.8 |

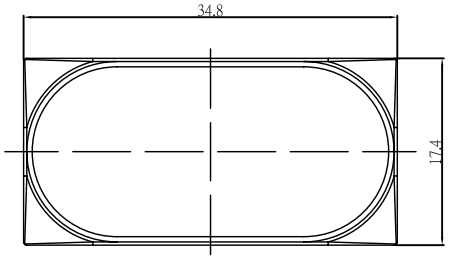


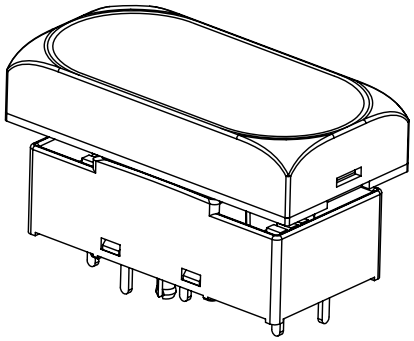




SW CIRCUIT



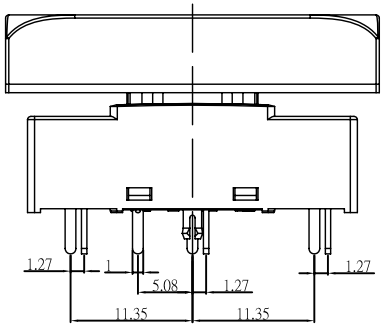





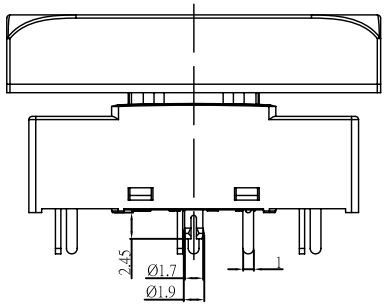







LED CIRCUIT

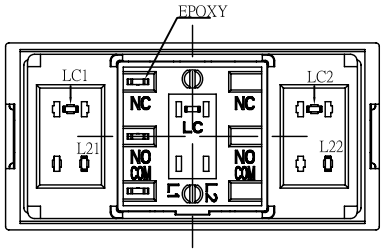


1. RATING : 28 V DC , 0.4A .
2. CONTACT RESISTANCE : 100 m¦, MAX .
3. INSULATION RESISTANCE : DC 500 V / 100 M¦, MIN .
4. WITHSTAND VOLTAGE : AC 500 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25℃ ~ 70℃ .
6. OPERATING FORCE : 200±100 gf .
7. LIFE CYCLE: 200,000 CYCLES .

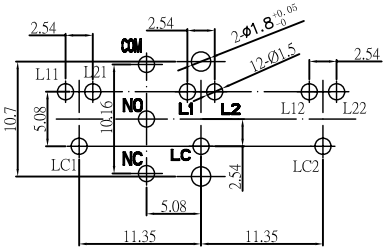


PCB LAYOUT
[referance dawing]

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | UNIT | SCALE | ANGLE TER | VIEW | MODE | WWW.SZLAKEVIEW.COM | |
| V0 | 2016/03/15 | JOHNSON | ALEN | MIKE | ORIGINAL DESIGN | mm | 1 : 1 | ± 3° | | PUSH SWITCH WITH LED | ELECTRONICS CO., LTD | |
| VER | DATE | APPROVAL | CONFIRM | DESIGN | ENGINEERING RECORD DESCRIPTION | PLB-N1PNB-DTW | | | | | Tel: | (86)755-29424722/29424733 |