

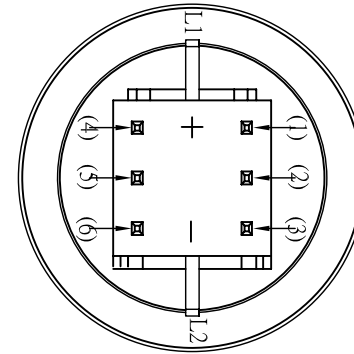
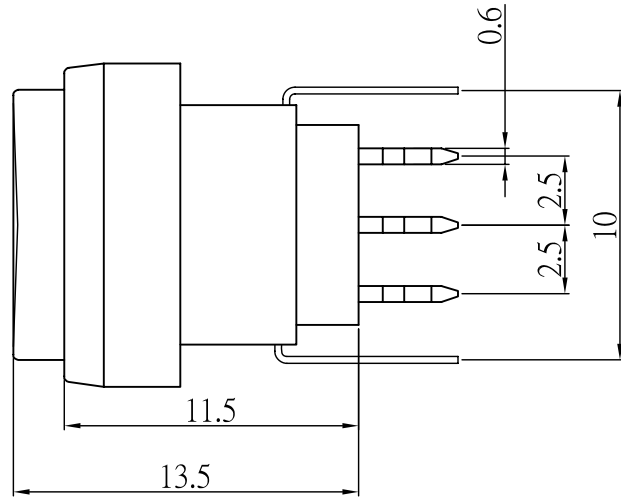





DIMENSION	TOLERANCE
≤10	±0.3
10~100	±0.5
≥100	±0.8

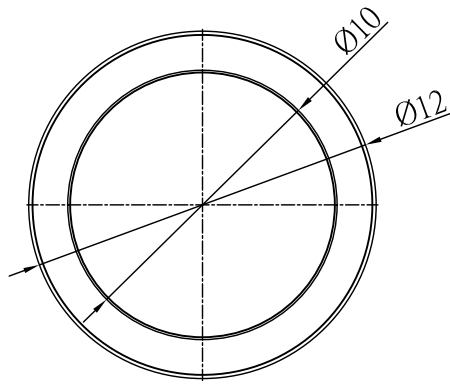

PCB LAYOUT

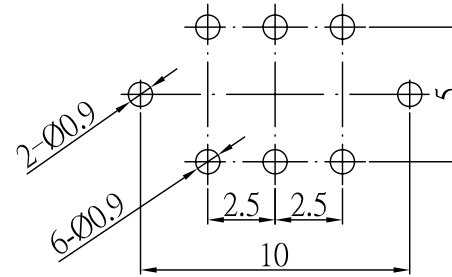

CIRCUIT DIAGRAMS

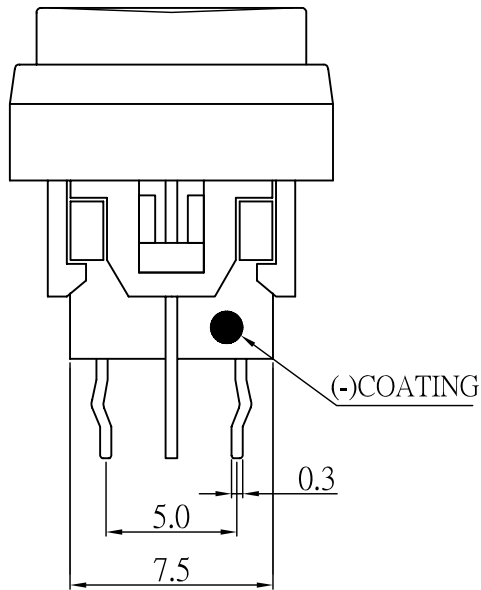

1. 2P2T , NON-LOCK TYPE .
2. RATING : 0.1A 30VDC MAX ; 0.1mA 5VDC MIN .
3. CONTACT RESISTANCE : 50 mΩ , MAX .
4. INSULATION RESISTANCE : 250 V DC , 100 MΩ , MIN .
5. OPERATING TEMPERATURE : -20°C ~ 70°C .
6. OPERATING FORCE : 250±100 gf .
7. OPERATING LIFE : 50,000 CYCLES .

VER	DATE	APPROVAL	CONFIRM	DESIGN	ENGINEERING RECORD DESCRIPTION	UNIT	SCALE	ANGLE TER	VIEW	MODE	
V0	2015/02/15	JOHNSON	ALEN	MIKE	ORIGINAL DESIGN	mm	1 : 1	± 3°		PUSH WITH LED SWITCH	
						PLA-N2P-R1G1-R3KT			WWW.SZLAKEVIEW.COM ELECTRONIS CO.,LTD		
						Tel: (86)755-29424722			Fax: (86)755-29424733		