




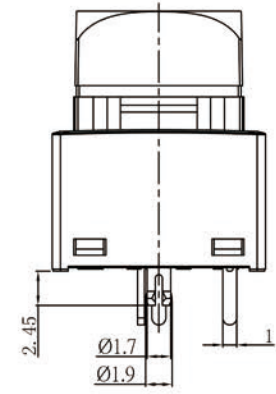
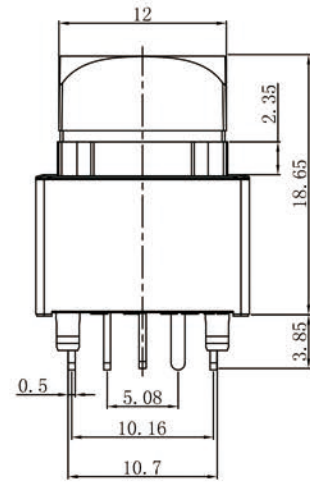



DIMENSION	TOLERANCE
≤10	± 0.3
10~100	± 0.5
≥100	± 0.8

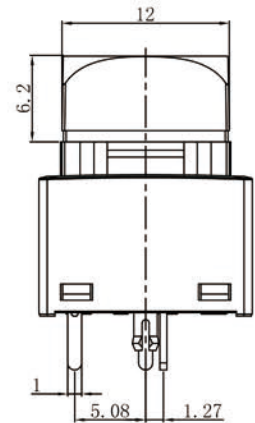


SW CIRCUIT

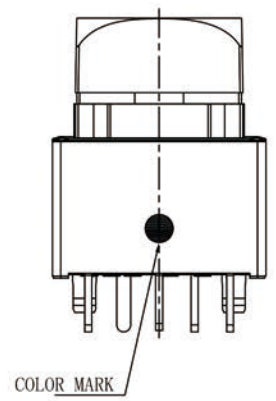

LED CIRCUIT



1. RATING : 28 V DC , 0.4A .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : DC 500 V / 100 MΩ MIN .
4. WITHSTAND VOLTAGE : AC 500 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25°C ~ 70°C .
6. OPERATING FORCE : 200±100 gf .
7. LIFE CYCLE: 200,000 CYCLES .



PCB LAYOUT  
[reference dawning]

UNIT	SCALE	ANGLE TER	VIEW	MODE					
mm	1 : 1	± 3°		PUSH WITH LED SWITCH					
					PLB-N1PNR-FTW				
					Tel: (86)755-29424722/29424733				