


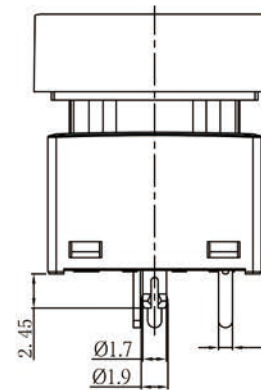
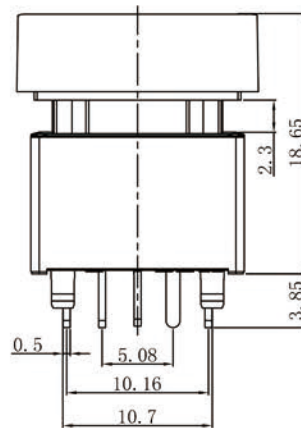
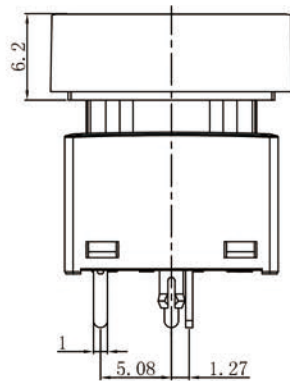




| DIMENSION | TOLERANCE |
|-----------|-----------|
| ≤10       | ± 0.3     |
| 10~100    | ± 0.5     |
| ≥100      | ± 0.8     |




1. RATING : 28 V DC , 0.4A .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : DC 500 V / 100 MΩ MIN .
4. WITHSTAND VOLTAGE : AC 500 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25°C ~ 70°C .
6. OPERATING FORCE : 200±100 gf .
7. LIFE CYCLE: 200,000 CYCLES .



SW CIRCUIT



LED CIRCUIT



PCB LAYOUT  
[referance dawing]

| UNIT | SCALE | ANGLE TER | VIEW    | MODE                 |  |
|------|-------|-----------|---------|----------------------|--|
| mm   | 1 : 1 | ± 3°      |         | PUSH WITH LED SWITCH | WWW.SZLAKEVIEW.COM<br>ELECTRONICS CO., LTD |
| VER  | DATE  | APPROVAL  | CONFIRM | DESIGN               | ENGINEERING RECORD DESCRIPTION             |
|      |       |           |         |                      | PLB-NIPWB-C1TW                             |
|      |       |           |         |                      | Tel: (86) 755-29424722/29424733            |