DIMENSION	TOLERANCE
≤10	±0.3
10~100	±0.5
≥100	±0.8

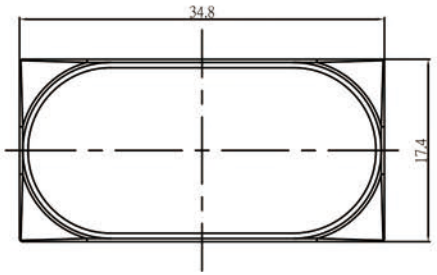

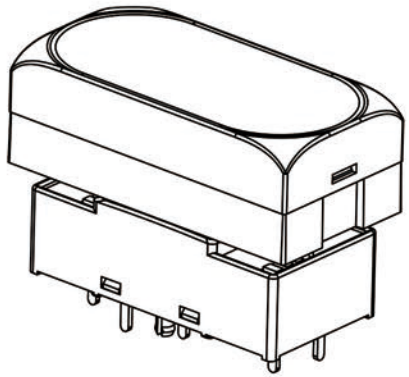



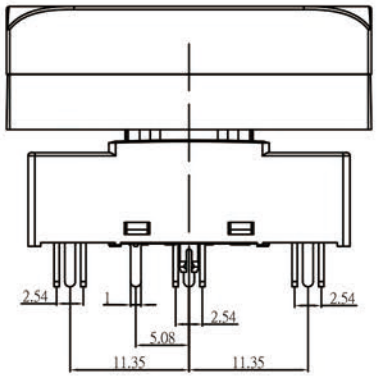

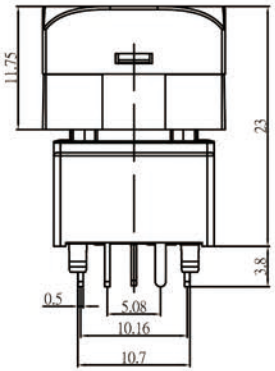

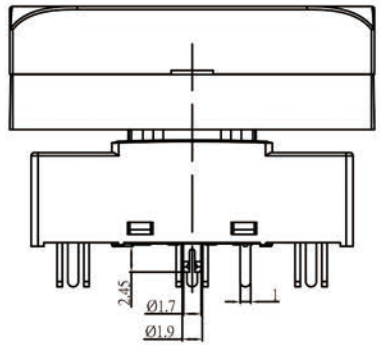



SW CIRCUIT







LED CIRCUIT

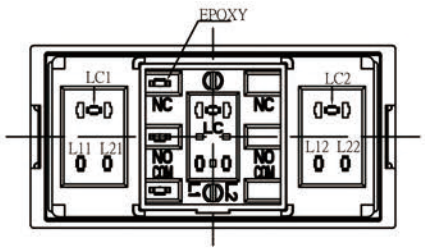

1. RATING : 28 V DC , 0.4A .
2. CONTACT RESISTANCE : 100 mΩ, MAX .
3. INSULATION RESISTANCE : DC 500 V / 100 MΩ, MIN .
4. WITHSTAND VOLTAGE : AC 500 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25℃ ~ 70℃ .
6. OPERATING FORCE : 200±100 gf .
7. LIFE CYCLE: 200,000 CYCLES .

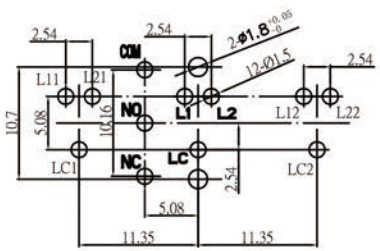

PCB LAYOUT
[referance dawing]

						UNIT	SCALE	ANGLE TER	VIEW	MODE	LaKe-View Electronics Co.,Ltd
V0	2016/03/15	JOHNSON	ALEN	MIKE	ORIGINAL DESIGN	mm	1 : 1	±3°		PUSH WITH LED SWITCH	
VER	DATE	APPROVAL	CONFIRM	DESIGN	ENGINEERING RECORD DESCRIPTION	PLB-N1PWB-D1TW					Tel: (86)755-29424722/29424733