


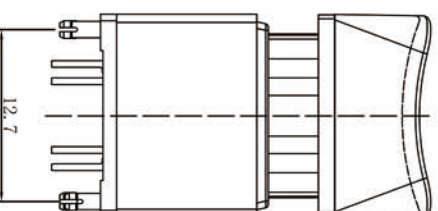
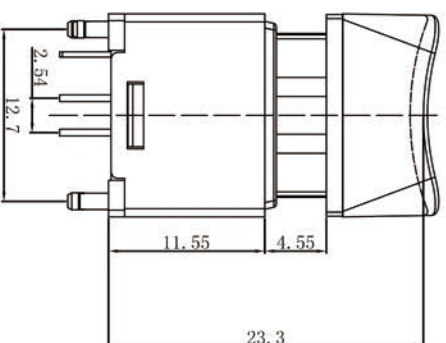
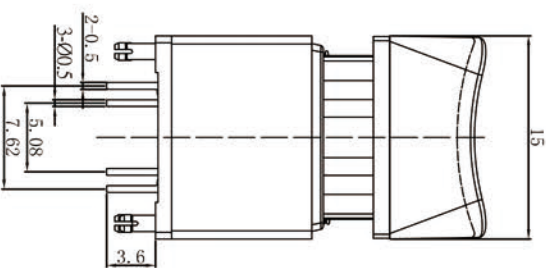
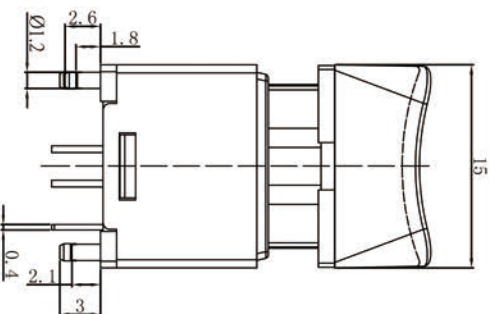




DIMENSION	TOLERANCE
≤10	± 0.3
10~100	± 0.5
≥100	± 0.8



SW CIRCUIT



LED CIRCUIT

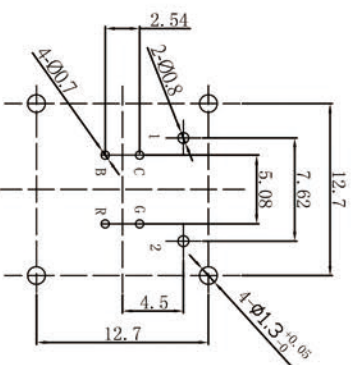

PCB LAYOUT

1. RATING : 12 V DC , 0.1A .
2. CONTACT RESISTANCE : 200 mΩ MAX . (Initial)
3. INSULATION RESISTANCE : 100 MΩ MIN(DC 250V) .
4. WITHSTAND VOLTAGE : AC 250 V / 1 MINUTE.
5. OPERATING TEMPERATURE : -25°C ~ 70°C .
6. OPERATING FORCE : 250 ± 100 gf .
7. FULL TRAVEL : 4.5 ± 0.3 .
8. LIFE CYCLE: 2,000,000 CYCLES .

NO	DATE	APPROVAL	CONFIRM	DESIGN	ORIGINAL DESIGN	ENGINEERING RECORD DESCRIPTION	UNIT	SCALE	ANGLE TRR	VIEW	MODE
10	2015/7/25	JOHNSON	ALEN	MIKE			mm	1 : 1	± 3°		PUSH SWITCH WITH LED
PLC-NITEN-B3TW											
Tel: (86) 755-29421722/29421733											