










DIMENSION	TOLERANCE
BELOW 10 mm	± 0.25
10~50 mm	± 0.4
ABOVE 50 mm	± 0.7




SW CIRCUIT



LED CIRCUIT

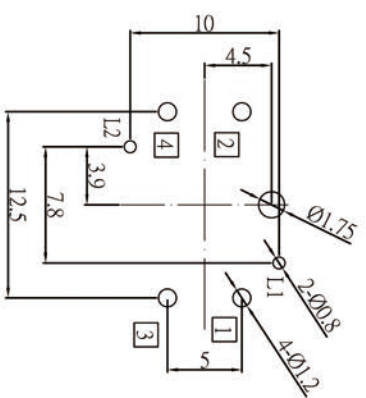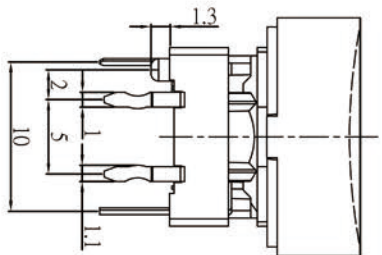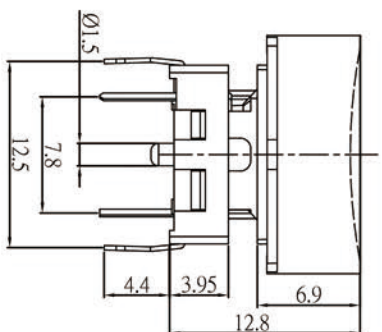

PCB LAYOUT

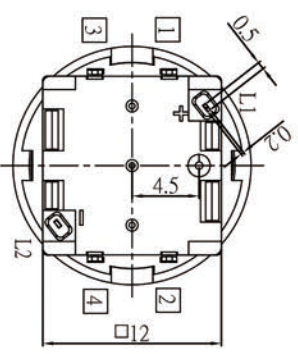

- SPECIFICATION :**
1. RATING : 12 VDC,50mA
 2. CONTACT RESISTANCE : 100mΩ MAX(INITIAL)
 3. INSULATION RESISTANCE:100MΩ MIN
 4. BREAKDOWN VOLTAGE : 250 VAC FOR 1 MINUTE
 5. OPERATING FORCE : 250±50gf
 6. TOTAL TRAVEL : 0.4±0.15mm
 7. OPERATING TEMPERATURE: -20°C ~ 70°C
 8. LIFE CYCLE : 500,000 CYCLE

VER	DATE	APPROVAL	CONFIRM	DESIGN	ENGINEERING RECORD DESCRIPTION	UNIT	MODE	TACT SWITCH WITH LED	VIEW
V0	2015/7/25	JOHNSON	ALEN	MIKE	ORIGINAL DESIGN	mm	ANGLE TER	4.3°	WWW.SZLAKEVIEW.COM ELECTRONICS CO., LTD
						SCALE			PHONE (86)755-29424722/29424733
						PART			