








| DIMENSION | TOLERANCE |
|-------------|-----------|
| BELOW 10 mm | ± 0.25 |
| 10 ~ 50 mm | ± 0.4 |
| ABOVE 50 mm | ± 0.7 |



SW CIRCUIT

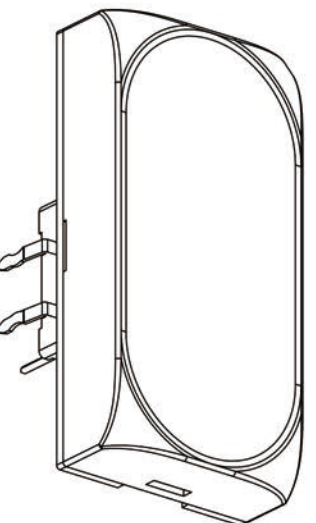

LED CIRCUIT

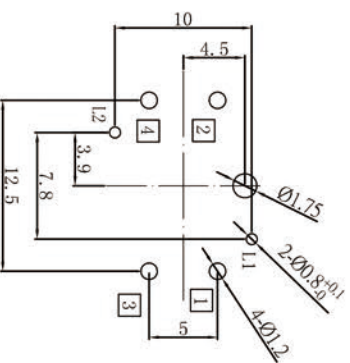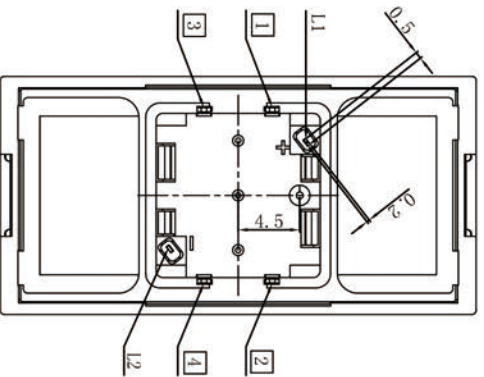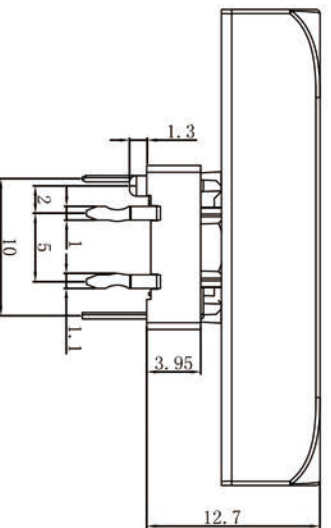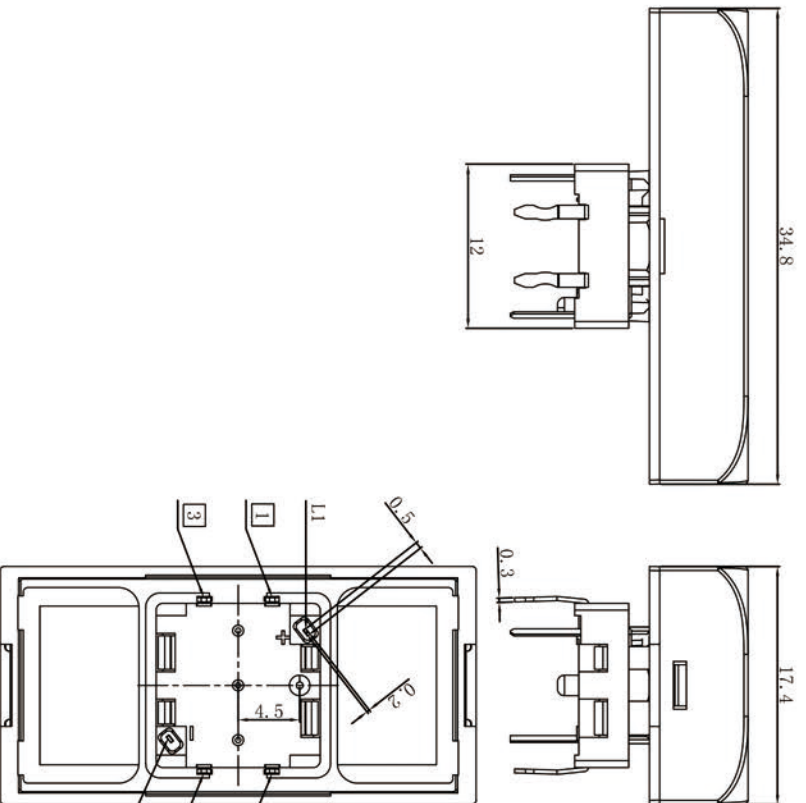

PCB LAYOUT

SPECIFICATION :

1. RATING : 12 VDC, 50mA
2. CONTACT RESISTANCE : 100m Ω MAX(INITIAL)
3. INSULATION RESISTANCE:100M Ω MIN
4. BREAKDOWN VOLTAGE : 250 VAC FOR 1 MINUTE
5. OPERATING FORCE : 250 \pm 50gf
6. TOTAL TRAVEL : 0.4 \pm 0.15mm
7. OPERATING TEMPERATURE: -20 $^{\circ}$ C ~ 70 $^{\circ}$ C
8. LIFE CYCLE : 500,000 CYCLE

| NO | DATE | APPROVAL | CONFIRM | DESIGN | ENGINEERING | RECORD | DESCRIPTION | UNIT | SCALE | MODE | TACT WITH LED SWITCH | VIEW |
|----|-----------|----------|---------|--------|-----------------|--------|-------------|------|-------|-----------|----------------------|--|
| 00 | 2015/7/25 | JOHNSON | ALEN | MINE | ORIGINAL DESIGN | | | mm | 1 : 1 | ANGLE TER | ± 3 $^{\circ}$ | WWW.SZLAKEVIEW.COM ELECTRONICS CO., LTD |