

# DSP11 SERIES

Customization TFT Touch Panel

More custom sizes, better suited for various devices and environments.



- 2 RU rack-mountable metal enclosure

---

- 800 cd/m2 peak luminance with adjustable backlight

---


- Wide viewing angle

---

- Optically bonded Projected Capacitive Touch (PCT) Multi-touch > 5 fingers

---

- Shallow depth < 70 mm (2.76")

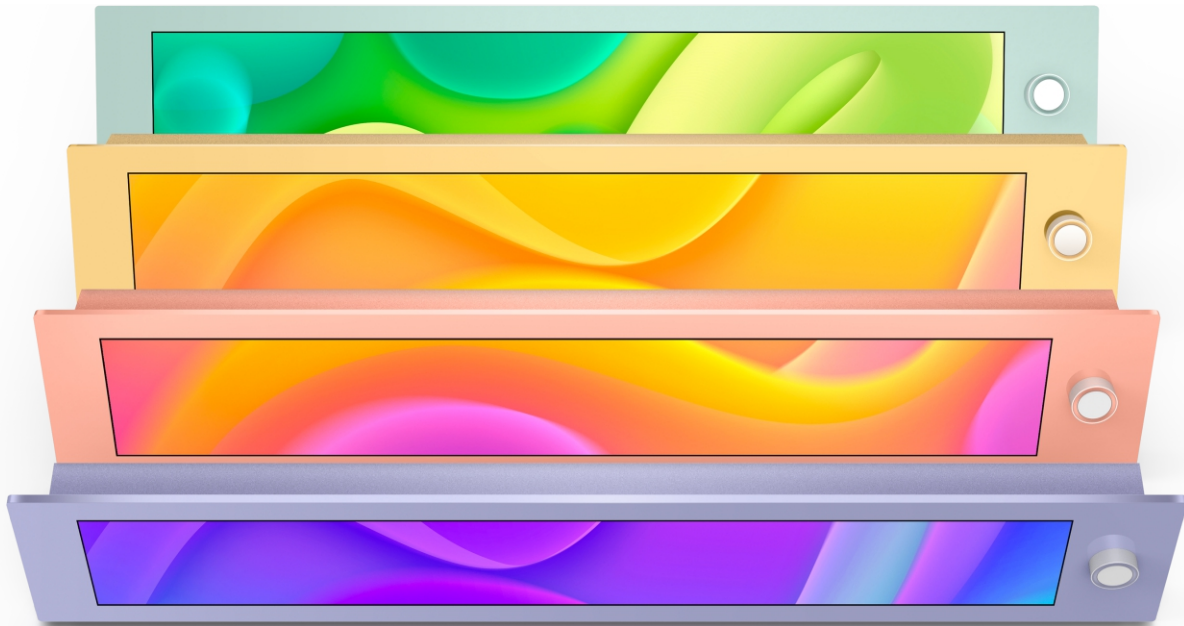

- Ergonomic design with excellent tactile feel and responsiveness.
- Optimized user screen layouts for each function and alternative device control sets.
- Shallow depth 2 RU housing with external AC/DC adapter for easy mounting in consoles and desks or engineering racks and bays.
- High peak luminance and wide viewing angle.
- Adjustable screen contrast, brightness, and backlight for optimal viewing in different ambient lighting conditions.

## EXTERNAL I/O

### Ethernet:

10/100/1000Mb/s (IEEE 802.3af)

### USB:

2 x user ports, 1 x OTG (On-The-Go) micro port

### Micro SD card:

1 x boot, 1 x storage

## POWER

### Connector:

DC jack (Screw-lock connector)

### Voltage:

12V DC nominal (11.0-12.5)

### Current:

2A max.

## ENVIRONMENTAL

### Operating temperature:

+50°C (122°F) max.

### Ventilation:

Rear panel (fanless cooling)

## COMPLIANCE

### Hazardous material:

RoHS-6 (UK)-Complies with EU Directive